


Scholman **Techniek**



High Speed D'e'clipping trolley **DATASHEET**

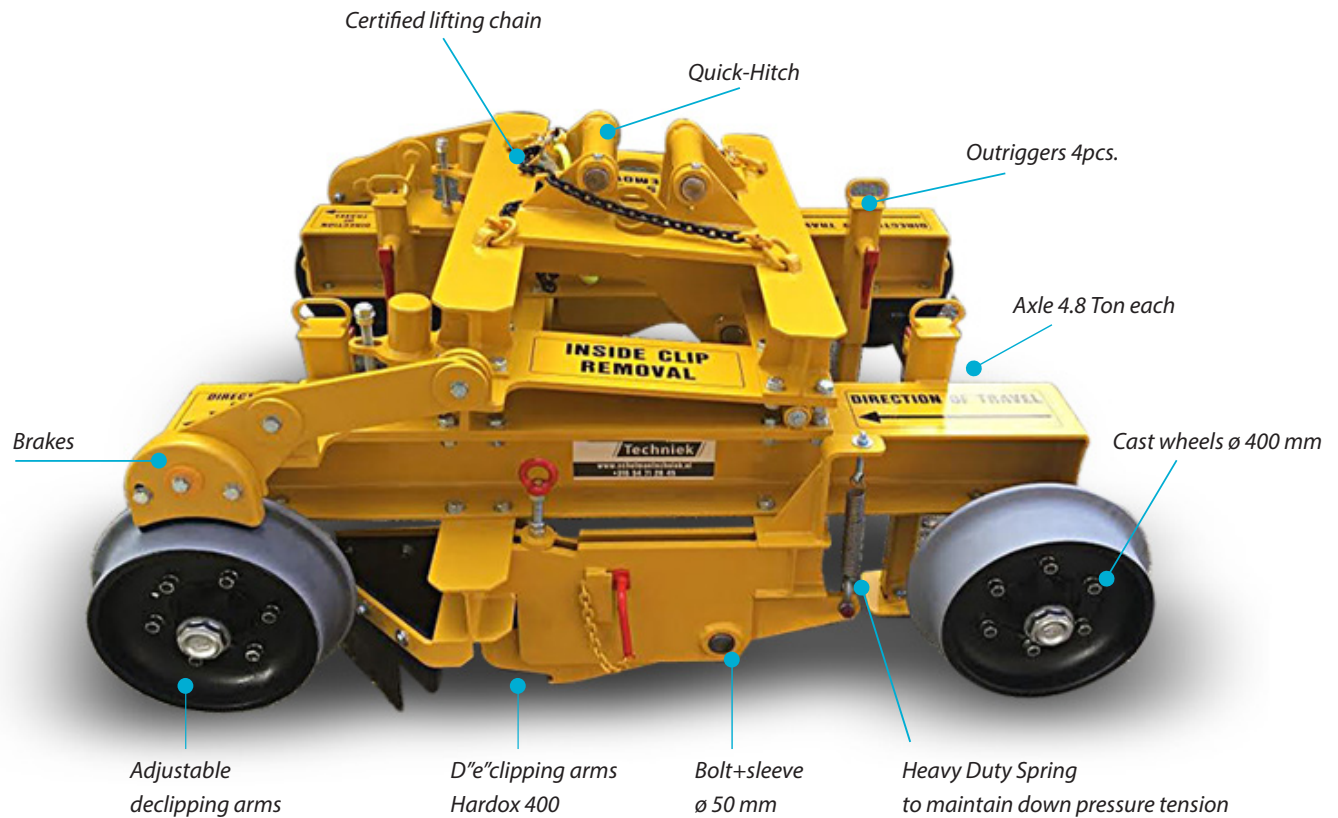

Specifications

Declipping arms	Made from Hardox 400
Constuktion	Made from Steel S355
Rail	Fully adjustable t/m 68kg/m rail
Best performance	5-10 km/h
Gauge	1.435 mm
Excavator Hitch	Pettibone, available with every Quick-Hitch
Brakes	Automatic brakes.
Wheels	ø 400 mm for a low rolling resistance
Axles	4.8 tons axle(2 pcs.)
Outriggers	For safety transport and storage
Lashing	Weld-On Pivot Link
Rubber shroud	Safety shield for "e" clips.
Certificaten	CE certificate conform Australian standards and Manufacture Certificate
Weight	1.275 kg.

This High Speed D'e'clipping trolley was designed and fabricated for the removal of Pandrol "e" clips with a toe load of 18KN. The trolley can be set to remove the clips from just one rail or from both rails at the same time. (one way up and one way down)

The trolley was engineered and fabricated through Scholman Techniek by certified welders.

Scholman Techniek

Scholman Techniek

Nedereindseweg 537


3546 PN Utrecht

The Netherlands

M: +31 (0)6 54 71 26 45

E: john@scholmantechneik.nl

www.scholmantechneik.nl

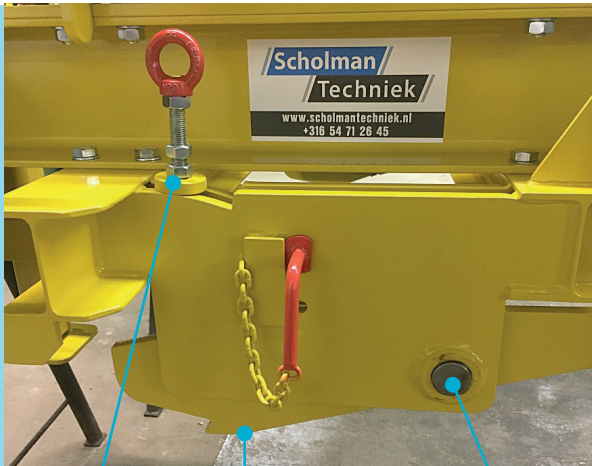

Fully height
adjustable

Hardox 400
D'e'clipping arms

ø 50 mm
bolt and sleeve



Outriggers totally 4pcs.



Weld-On Pivot Link
for lashing